

Part IV – Finishing Touches

Drawer Detail

26

Now that everything is just about done, I like to pay some attention to the details, especially in the drawers. I like to have a spot for everything, and that includes the twist-lock rings, tools, and the various parts that get attached and detached from the Incra LS Super System fence.

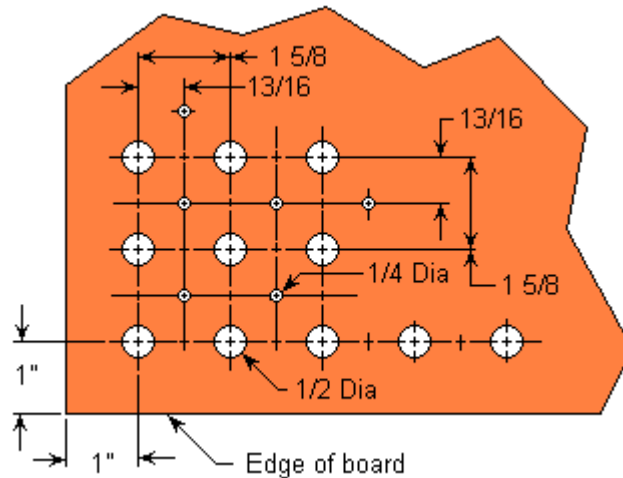


Figure 37

For the top drawer, I use it for router bits that are not in a set. As shown in figure 37, the $\frac{1}{2}$ " bored holes are $1 \frac{5}{8}$ on center, made into a square pattern, with the perimeter holes 1" from the side of the drawer. $\frac{1}{4}$ " bored holes are dispersed between the $\frac{1}{2}$ " holes to allow storage of both sizes. The bottoms are left over $\frac{3}{4}$ plywood from the cabinet base, glued to the drawer bottom.



Figure 38